


APPROVED BY: \_\_\_\_\_  
 DATE : \_\_\_\_\_

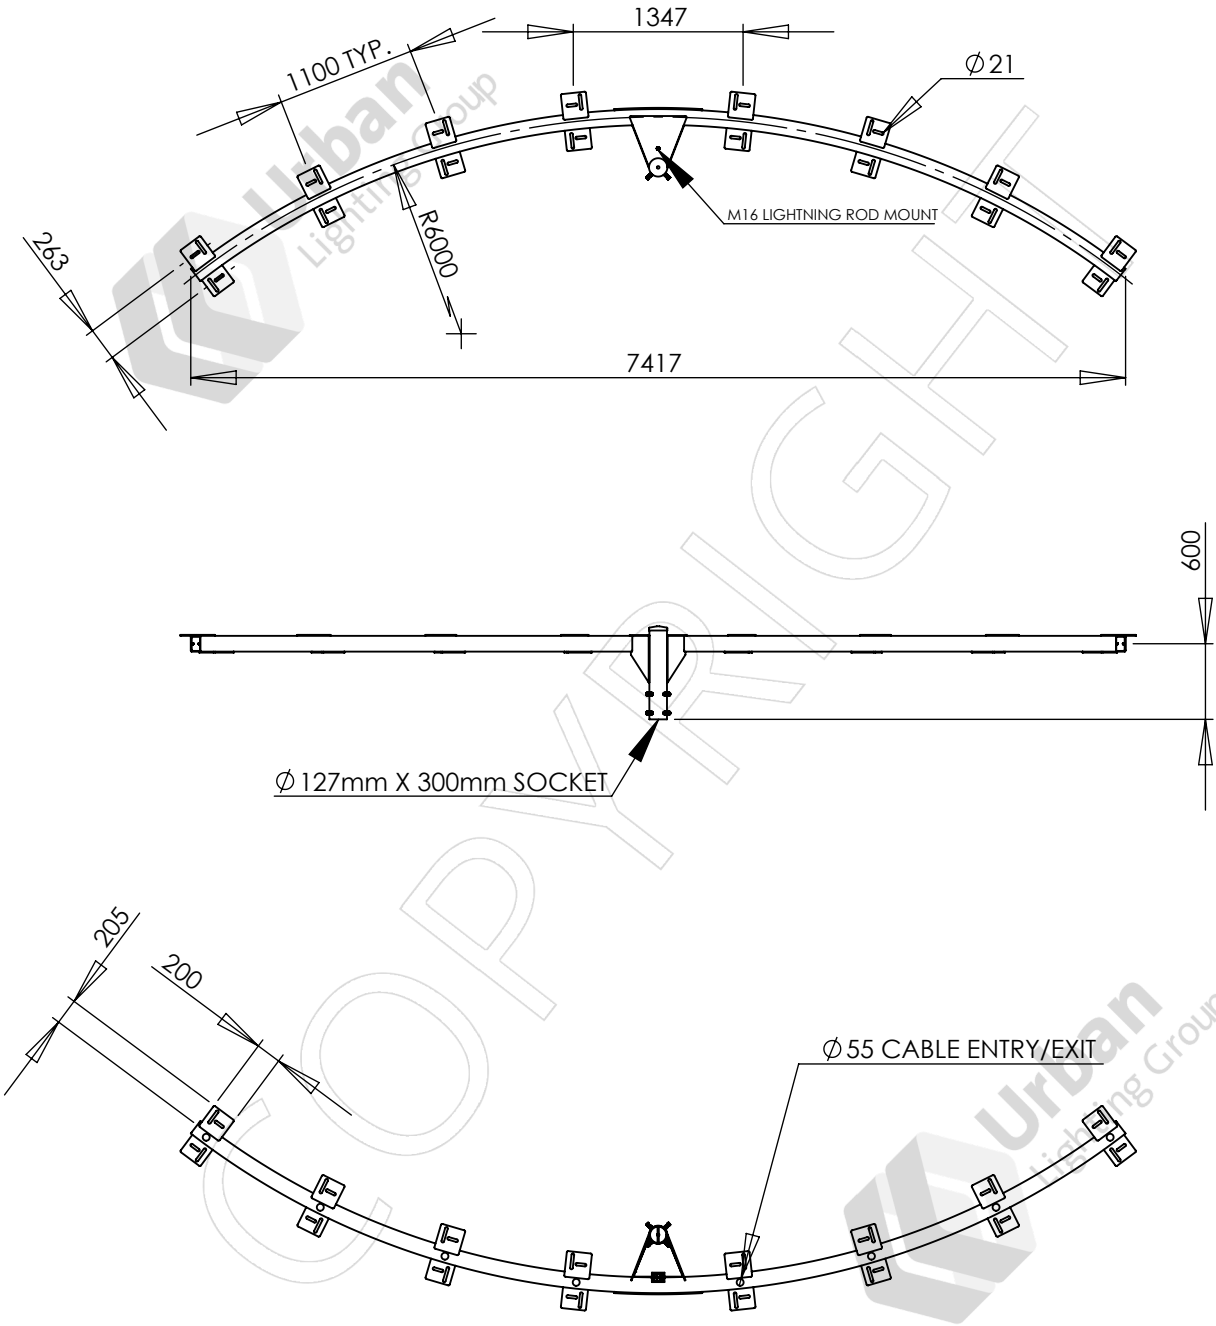

- Notes:
1. Dual bolt mount accepts luminaire mounts with  $\varnothing 20$  holes or slots at 55mm to 100mm pitch. This allows for 45° outward and 20° inward aiming when both bolts are used.
  2. Supplied with M20 x 60mm galvanized luminaire fixing bolts.
  3. Luminaires and cabling are not included unless specifically listed on the quotation.

Designed and manufactured to:  
 AS 1798 Lighting poles and arms - Preferred dimensions  
 AS/NZS 1170.2 Structural design actions - Part 2: Wind actions  
 AS 4100 Steel structures  
 AS 4680 Hot-dip galvanized (zinc) coatings  
 See DS-3040 for other design standards

PARTS LIST					
ITEM NO.	PART NUMBER	DESCRIPTION	DRAWING NO.	REV.	QTY.
1	HH16C-1060-8R6	8.0m 16 WAY CURVED HIGH MAST HEADFRAME	ADL-21016	1	1

REV.	DESCRIPTION	DATE	BY
1	INITIAL ISSUE	2022-11-10	KG

HH16C-1060-8R5 headframe			
Colour:			
Maximum load per mount: 16 x 0.6m <sup>2</sup> 30kg luminaires			
Wind loads: Region A, TC 2		Headframe / bracket ESA: 1.37m <sup>2</sup>	
Weight: 209kg		DO NOT SCALE	



Urban Lighting Group  
 Innovative Streetscape Solutions

Urban Lighting Group Pty Ltd  
 ABN 74 638 077 684  
 28 National Drive, Hallam Victoria 3803  
 T 1300 088 719  
 email: sales@urbanlightinggroup.com.au

Drawing No. GA-10577  
 Revision 1