



APPROVED BY: \_\_\_\_\_  
 DATE : \_\_\_\_\_

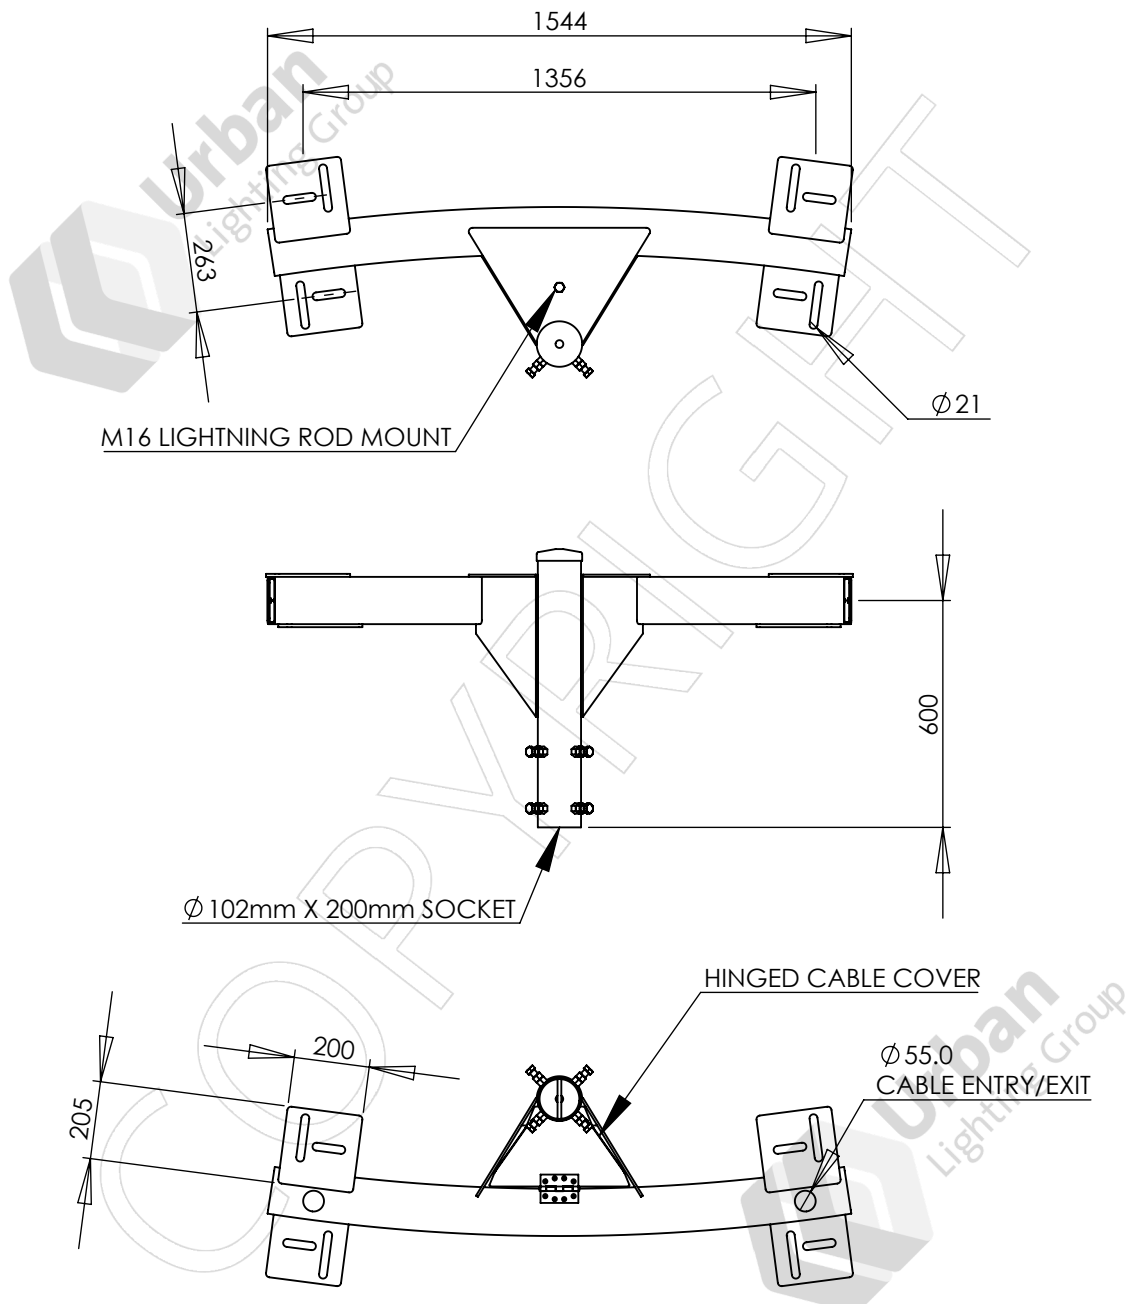

- Notes:
1. Dual bolt mount accepts luminaire mounts with  $\varnothing 20$  holes or slots at 55mm to 100mm pitch. This allows for 45° outward and 20° inward aiming when both bolts are used.
  2. Supplied with M20 x 60mm galvanized luminaire fixing bolts.
  3. Luminaires and cabling are not included unless specifically listed on the quotation.

Designed and manufactured to:  
 AS 1798 Lighting poles and arms - Preferred dimensions  
 AS/NZS 1170.2 Structural design actions - Part 2: Wind actions  
 AS 4100 Steel structures  
 AS 4680 Hot-dip galvanized (zinc) coatings  
 See DS-3040 for other design standards

PARTS LIST					
ITEM NO.	PART NUMBER	DESCRIPTION	DRAWING NO.	REV.	QTY.
1	HH4C-1300-1.6R5	1.6m 4 WAY CURVED HIGH MAST HEADFRAME	ADL-21013	1	1

REV.	DESCRIPTION	DATE	BY	HH4C-1300-1.6R5 4 Way High Mast Headframe			 <b>Urban Lighting Group</b> Innovative Streetscape Solutions Urban Lighting Group Pty Ltd ABN 74 638 077 684 28 National Drive, Hallam Victoria 3803 T 1300 088 719 email: sales@urbanlightinggroup.com.au	
1	INITIAL ISSUE	2022-11-09	KG	Colour:				
				Maximum load per mount: 4 x 0.75m <sup>2</sup> 50kg luminaires				
				Wind loads: Region A, TC 2	Headframe / bracket ESA: 0.315m <sup>2</sup>			
This drawing is the property of Urban Lighting Group Pty Ltd. No copies may be made without written permission				Weight: kg	DO NOT SCALE	Sheet 1 of 1	A4	Drawing No. <b>GA-10571</b> Revision 1