

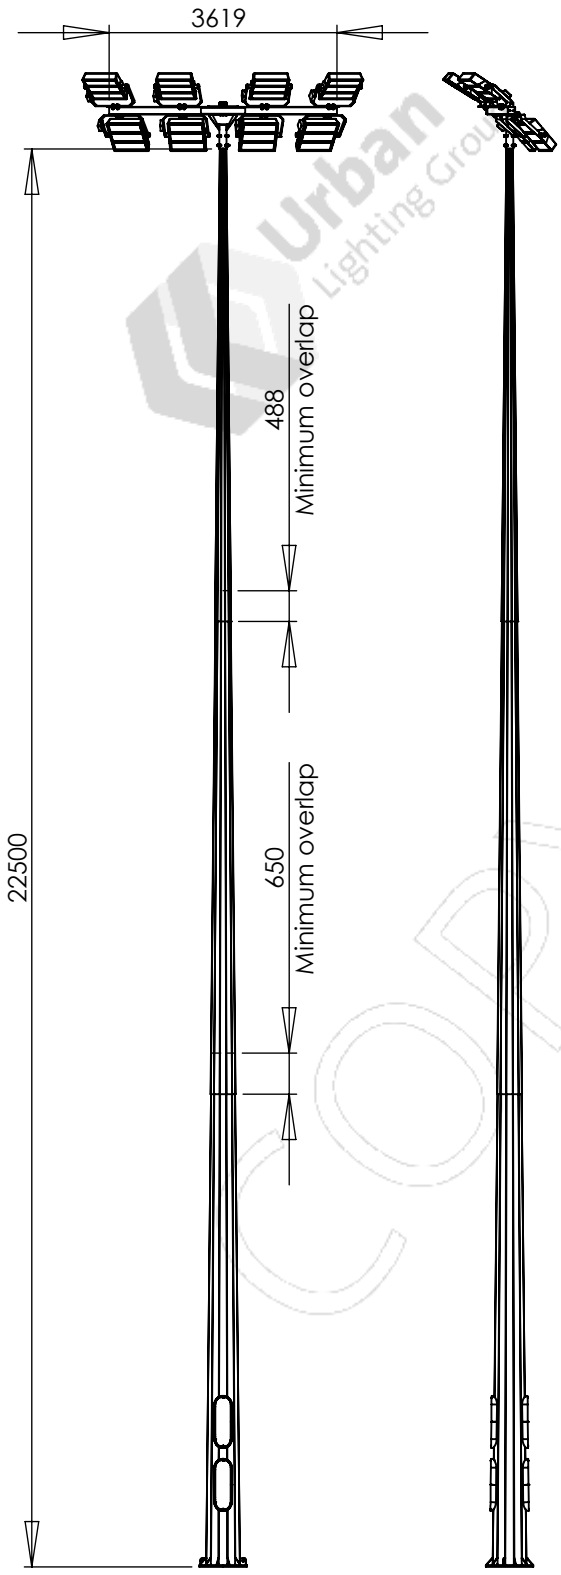

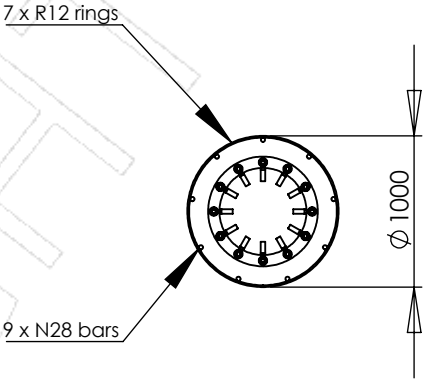

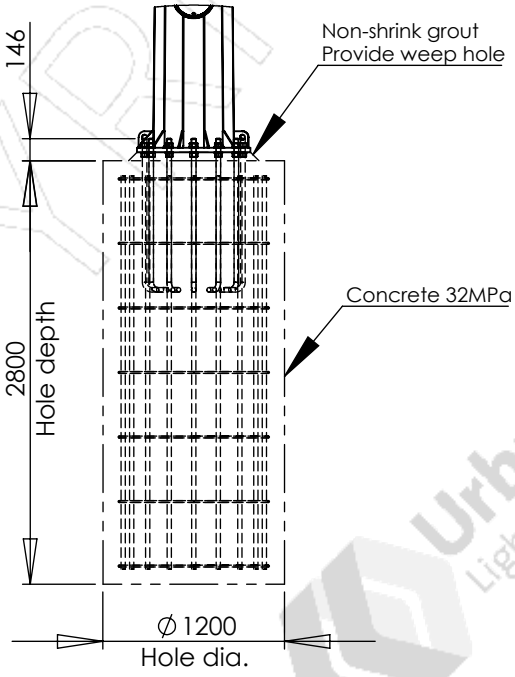

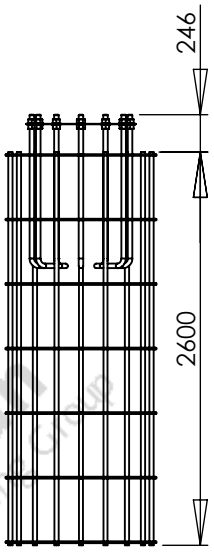

Parts list			
ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	FL225-D3-102535	22.5m High Mast Column	1
2	HFR8C-1060-3.7R5	3.7m 8 way curved headframe	1
3	ADL-20955 rev 1	Foundation Bolt Assembly, 12 x M30 x 650 PCD	1
4	REO-1000X2600	Reinforcing Cage, 1000 x 2600, 7xR12 9xN28	1

Notes:

1. Lift weight includes allowance for luminaires and cabling.
2. Luminaires and cabling are not included unless specifically listed on the quotation.
3. Footing details shown are indicative only. A site assessment must be carried out by a qualified engineer in order to account for site specific factors such as wind loads, soil conditions and terrain category. This assessment is the responsibility of the installation contractor. Urban Lighting Group takes no responsibility for use of the footing details shown on this sheet.
4. ULS moment and shear are calculated for wind loads per AS/NZS 1170.2 Region A, terrain category 2.

Designed and manufactured to:

AS 1798 Lighting poles and arms - Preferred dimensions
AS/NZS 1170.2 Structural design actions - Part 2: Wind actions
AS 4100 Steel structures
AS 4680 Hot-dip galvanized (zinc) coatings

FL225-D3-102535 with HFR8C-1060-3.7R5

Luminaires allowed for: 8 x Optivision BVP527 or similar

Dwg No. GA-10121 | 5-Feb-2021 | ULS moment: 240 kNm | ULS shear: 17.2 kN

Lift weight: 1531kg | DO NOT SCALE | Sheet 1 of 1 | A4

CONFIDENTIAL: This drawing is the property of Urban Lighting Group Pty Ltd.
No copies may be made without written permission

Urban Lighting Group
Urban Lighting Group Pty Ltd
ABN 74 638 077 684
28 National Drive, Hallam Victoria 3803
T 1300 088 719
email: sales@urbanlightinggroup.com.au